



## **ELEVATION** (SINGLE CONDUIT)

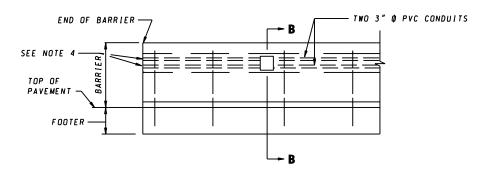

## **ELEVATION** (DOUBLE CONDUIT)

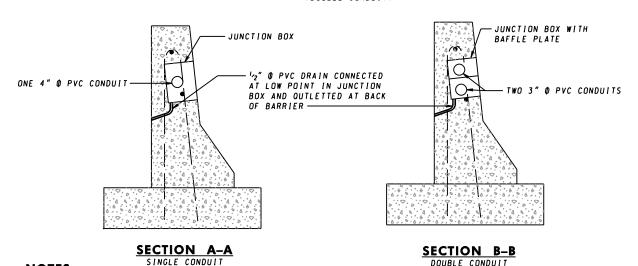

## **NOTES**

SPECIFICATION

- 1. THE JUNCTION BOXES SHALL BE LOCATED EVERY 750 FEET OR AS DIRECTED BY THE ENGINEER.
- 2. THE COST OF THE CONDUITS, JUNCTION BOXS, AND ALL APPURTENANCES SHALL BE INCLUDED IN THE COST OF THE BARRIER UNLESS OTHERWISE SPECIFIED.
- 3. IN INSTANCES WHERE THE BARRIER CONNECTS TO A BRIDGE PARAPET CONTAINING CONDUIT SHALL ALIGN.
- 4. CAP CONDUIT. COVER WITH 1" CONCRETE AND MARK FOR FUTURE REFERENCE, OR PROVIDE END TREATMENT AS DIRECTED BY THE ENGINEER OR AS SHOWN ON THE PLANS.
- 5. REFER TO SECTION 805 FOR CONDUIT. ETC.

CATEGORY CODE ITEMS

**Maryland Department of Transportation** 604 STATE HIGHWAY ADMINISTRATION Kik G. M. Call **APPROVED** STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES DIRECTOR - OFFICE OF HIGHWAY DEVELOPMENT CONDUIT AND JUNCTION BOX LOCATION FOR APPROVAL • FEDERAL APPROVAL • REVISIONS 34 INCH AND 42 INCH F SHAPE CONCRETE HIGHWAY ADMINISTRATION APPROVAL 3-1-01 APPROVAL 3-28-01 TRAFFIC BARRIER SINGLE FACE REVISED 10-1-01 REVISED REVISED STANDARD NO. MD 648.50 REVISED REVISED